


HUB 4 system wiring

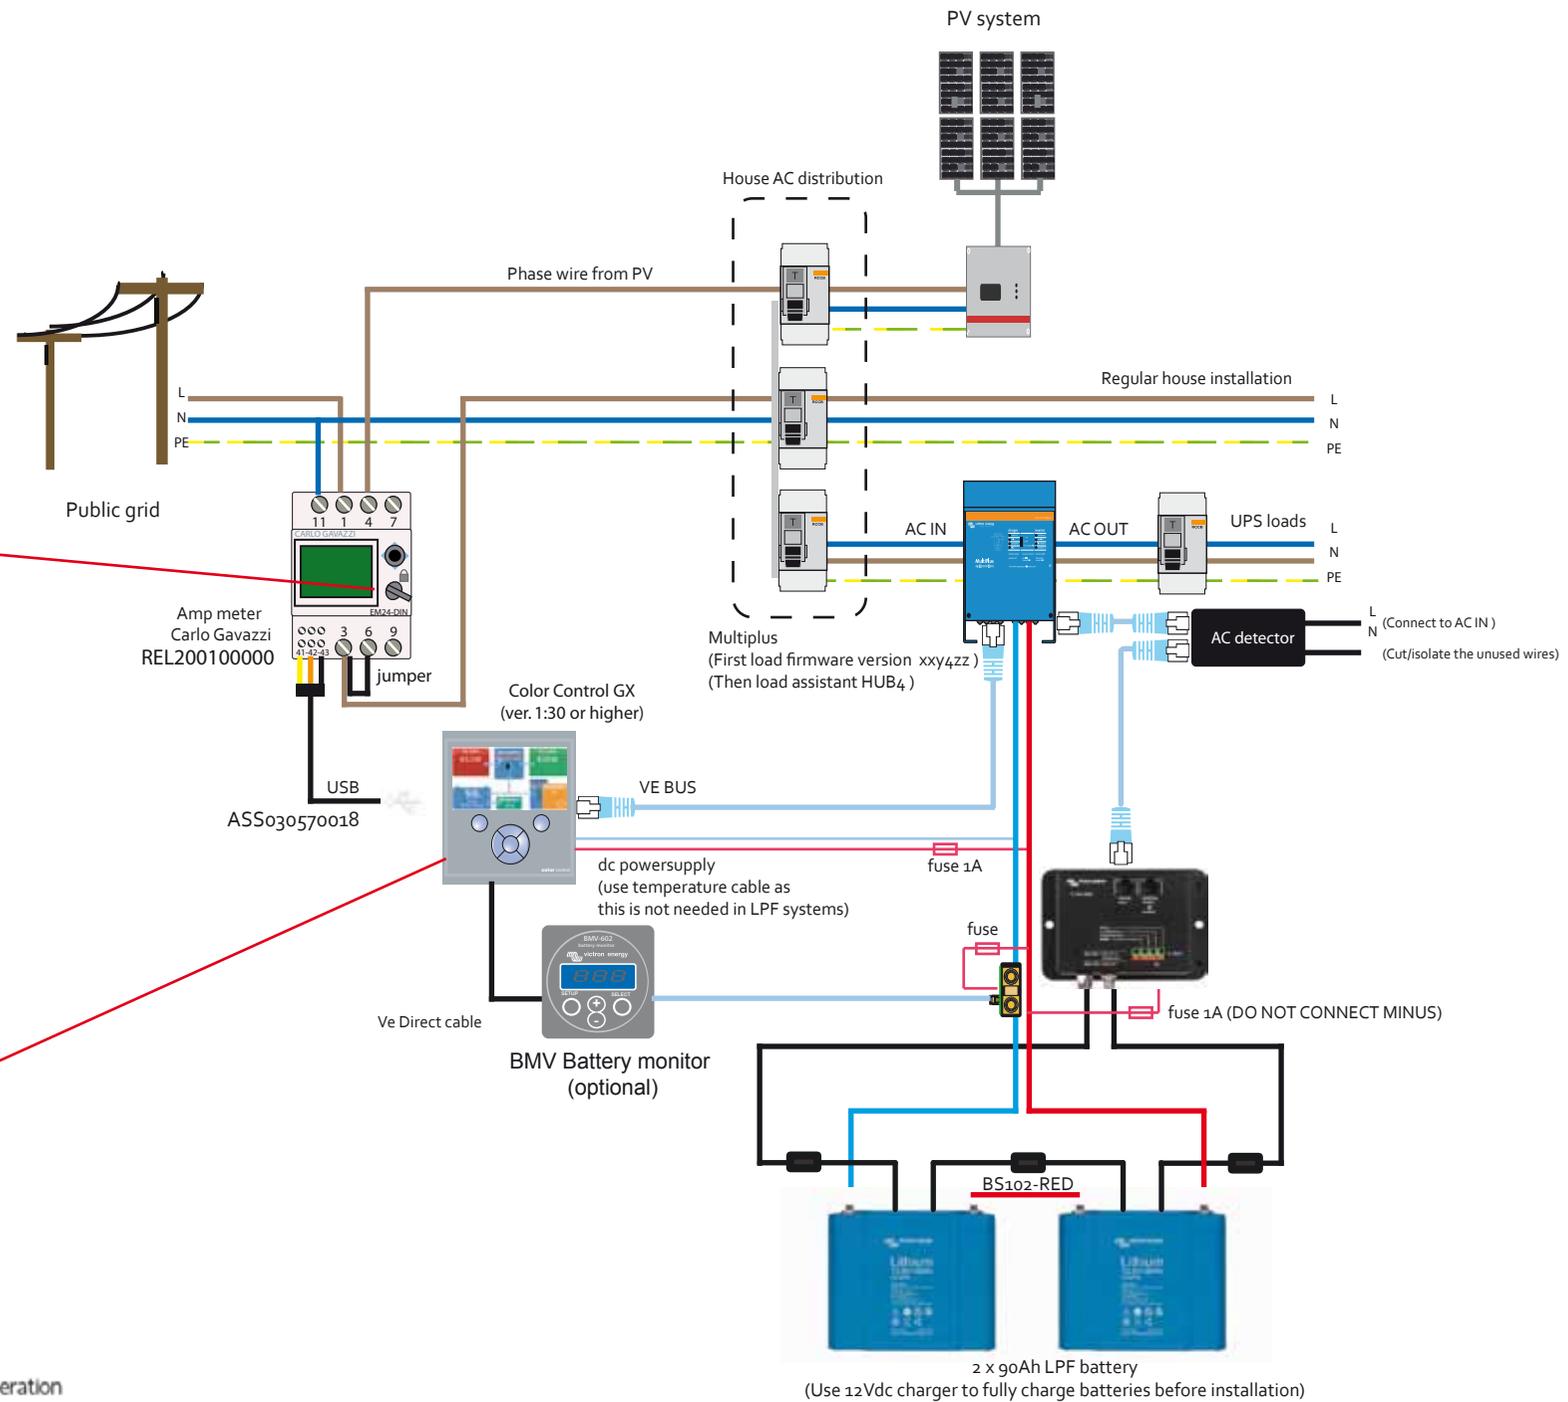

Make sure the rotary switch is NOT in the locked position!

Multiplus 1600 /24Vdc--> use standard DC Cabling
 Multiplus 3000-/48Vdc-->use 25mm2 minimal/max 5 mtr)

Make sure that

- Grid meter is selected with L2 for PV
- AC input is grid
- MAC address is written down
- VRM account is created
- Remote access is ON
- Two way communication is ON
- LAN/WLAN is connected